
FIREPLACE INSERT BEF THERM 6 CL
IN ACCORDANCE WITH EN 13 229

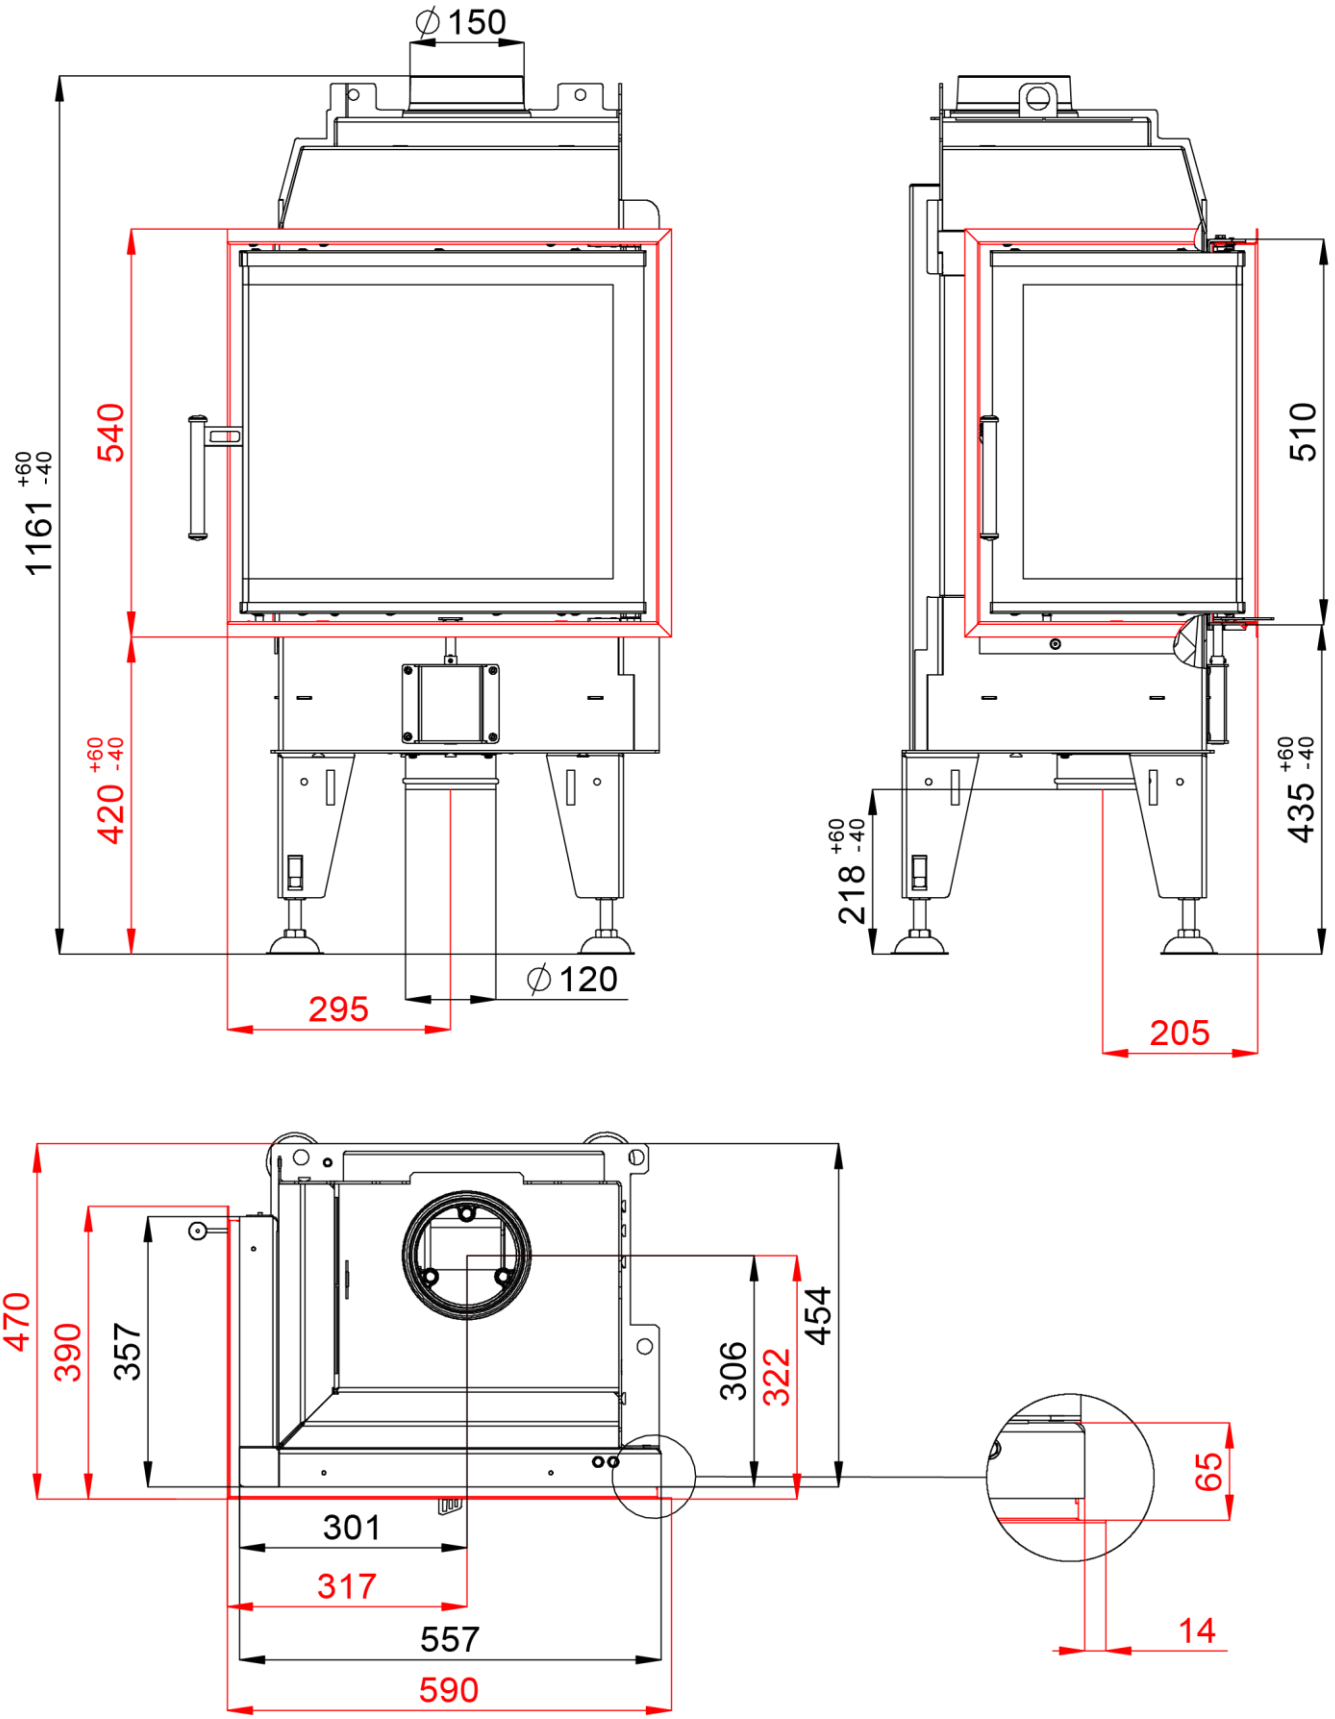


FIREPLACE INSERT BEF THERM 6 CL
IN ACCORDANCE WITH EN 13 229

Technical data:

Nominal heat output	kW	6
Efficiency	%	82
Volume flow of combustion products	g/s	4,6
Flue-gas temperature	^{o}C	262
Min. feed pressure at nominal heat output	Pa	12
Fuel		wood (beech logs)
Fuel consumption per hour	kg/h	1,85
CO emission in burnt gas (in relation to 13% O2)	%	0,0873
Dust in flue-gas (in relation to 13% O2)	mg/Nm^3	17
Smoke flue diameter	mm	150
Weight	kg	

Set of carcon firebox:

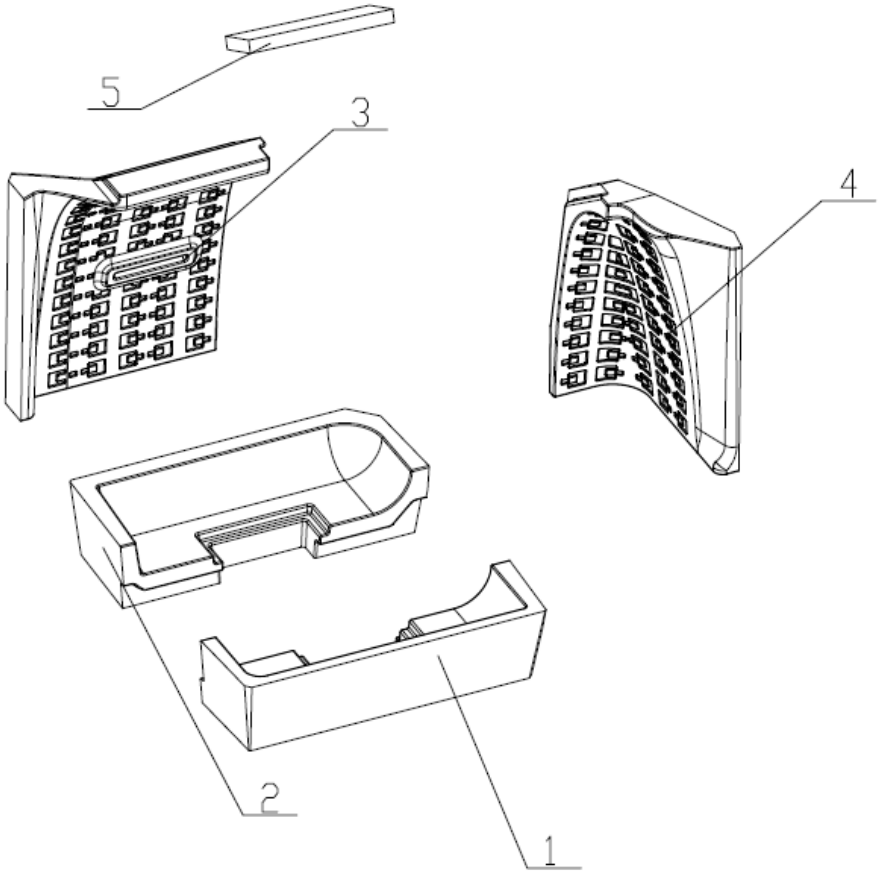

List of spare parts:

1. **Bottom**
2. **Bottom**
3. **Back**
4. **Side piece**
5. **Deflector**
6. **Cast iron grate**
7. **Ashtray**

For details see Installation and Service Instructions.